
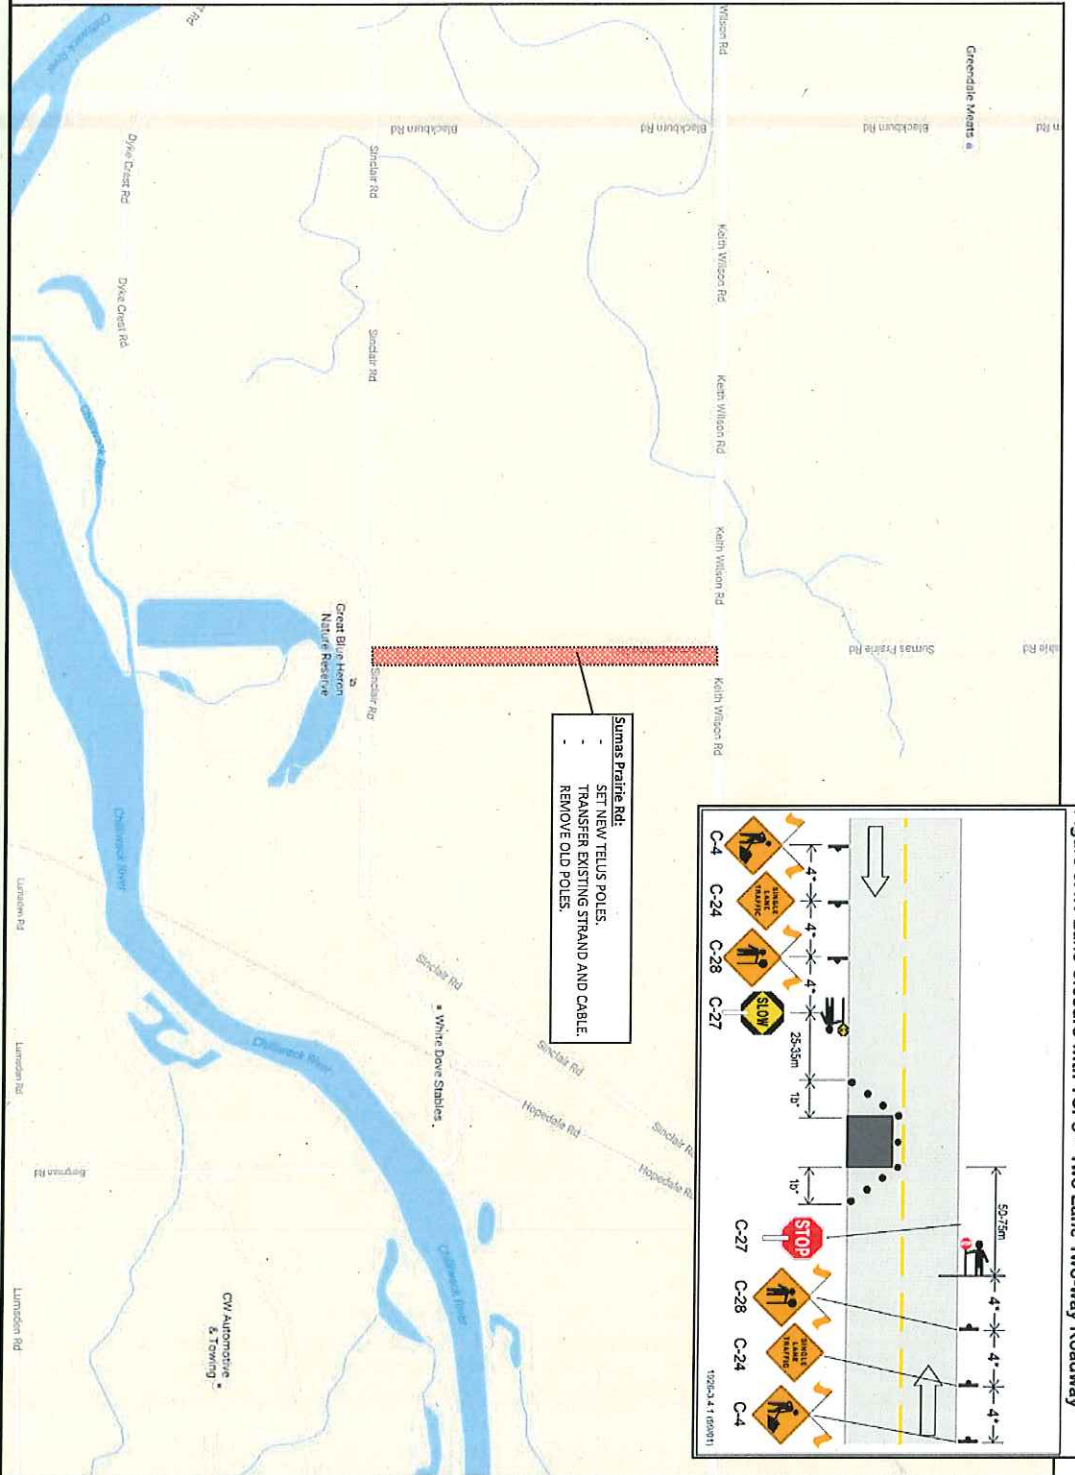


Figure 3.4.1 Lane Closure with TCPs – Two Lane Two-way Roadway

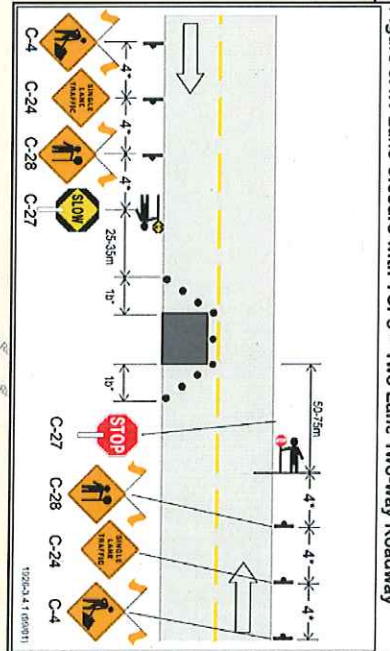

Sumas Prairie Bld:

- SET NEW TELLUS POLES
- TRANSFER EXISTING STRAND AND CABLE.
- REMOVE OLD POLES.

SCOPE:

- Place new TELLUS poles
- Transfer existing strand and cable
- Remove old poles

DATES:

- August 15 – September 2

HOURS:

- 7am – 5pm

DRAWING#:

- 2571515

NOTES:

- ALL TRAFFIC CONTROL DEVICES AND SIGNS TO COMPLY WITH LATEST MOTH MANUAL WORK ON ROADWAY.



N/A

Regulatory speed Limit	50 km/h	60 km/h	70 km/h	80 km/h	90-100 km/h
Taper Length For Lane Closure	35 (1:10)	55 (1:15)	75 (1:20)	90 (1:25)	110 (1:30)
Taper length for Shoulder Work on When TCPs Used (Min. 3 Cones)	5	8	10	12	15
Maximum Distance Between Cones or Taper Markers for 1s	10	10	10	10	10
Minimum Target Distances Between Tapes	30	60	90	120	150
Distance Between Construction Signs	40	60	80	100	150

LEGENDS:

- SIGN STAND
- DELINEATORS
- TCP
- ARROWBOARD TRUCK
- POLE
- REMOVE POLE
- MANHOLE/SERVICE BOX
- NEW AERIAL CABLE
- NEW U/G CABLE

COMPANY: DIXON NETWORKS CORPORATION

CONTACT: JAESIK YOON

PHONE: 604-940-8817 EXT. 225

DIXON NETWORKS CORPORATION