


Quarry Road (Near Brentwood Drive), Roadside Work – Encroachment into Travel Lane – Short and Long Duration (TMP 2, REV 001)

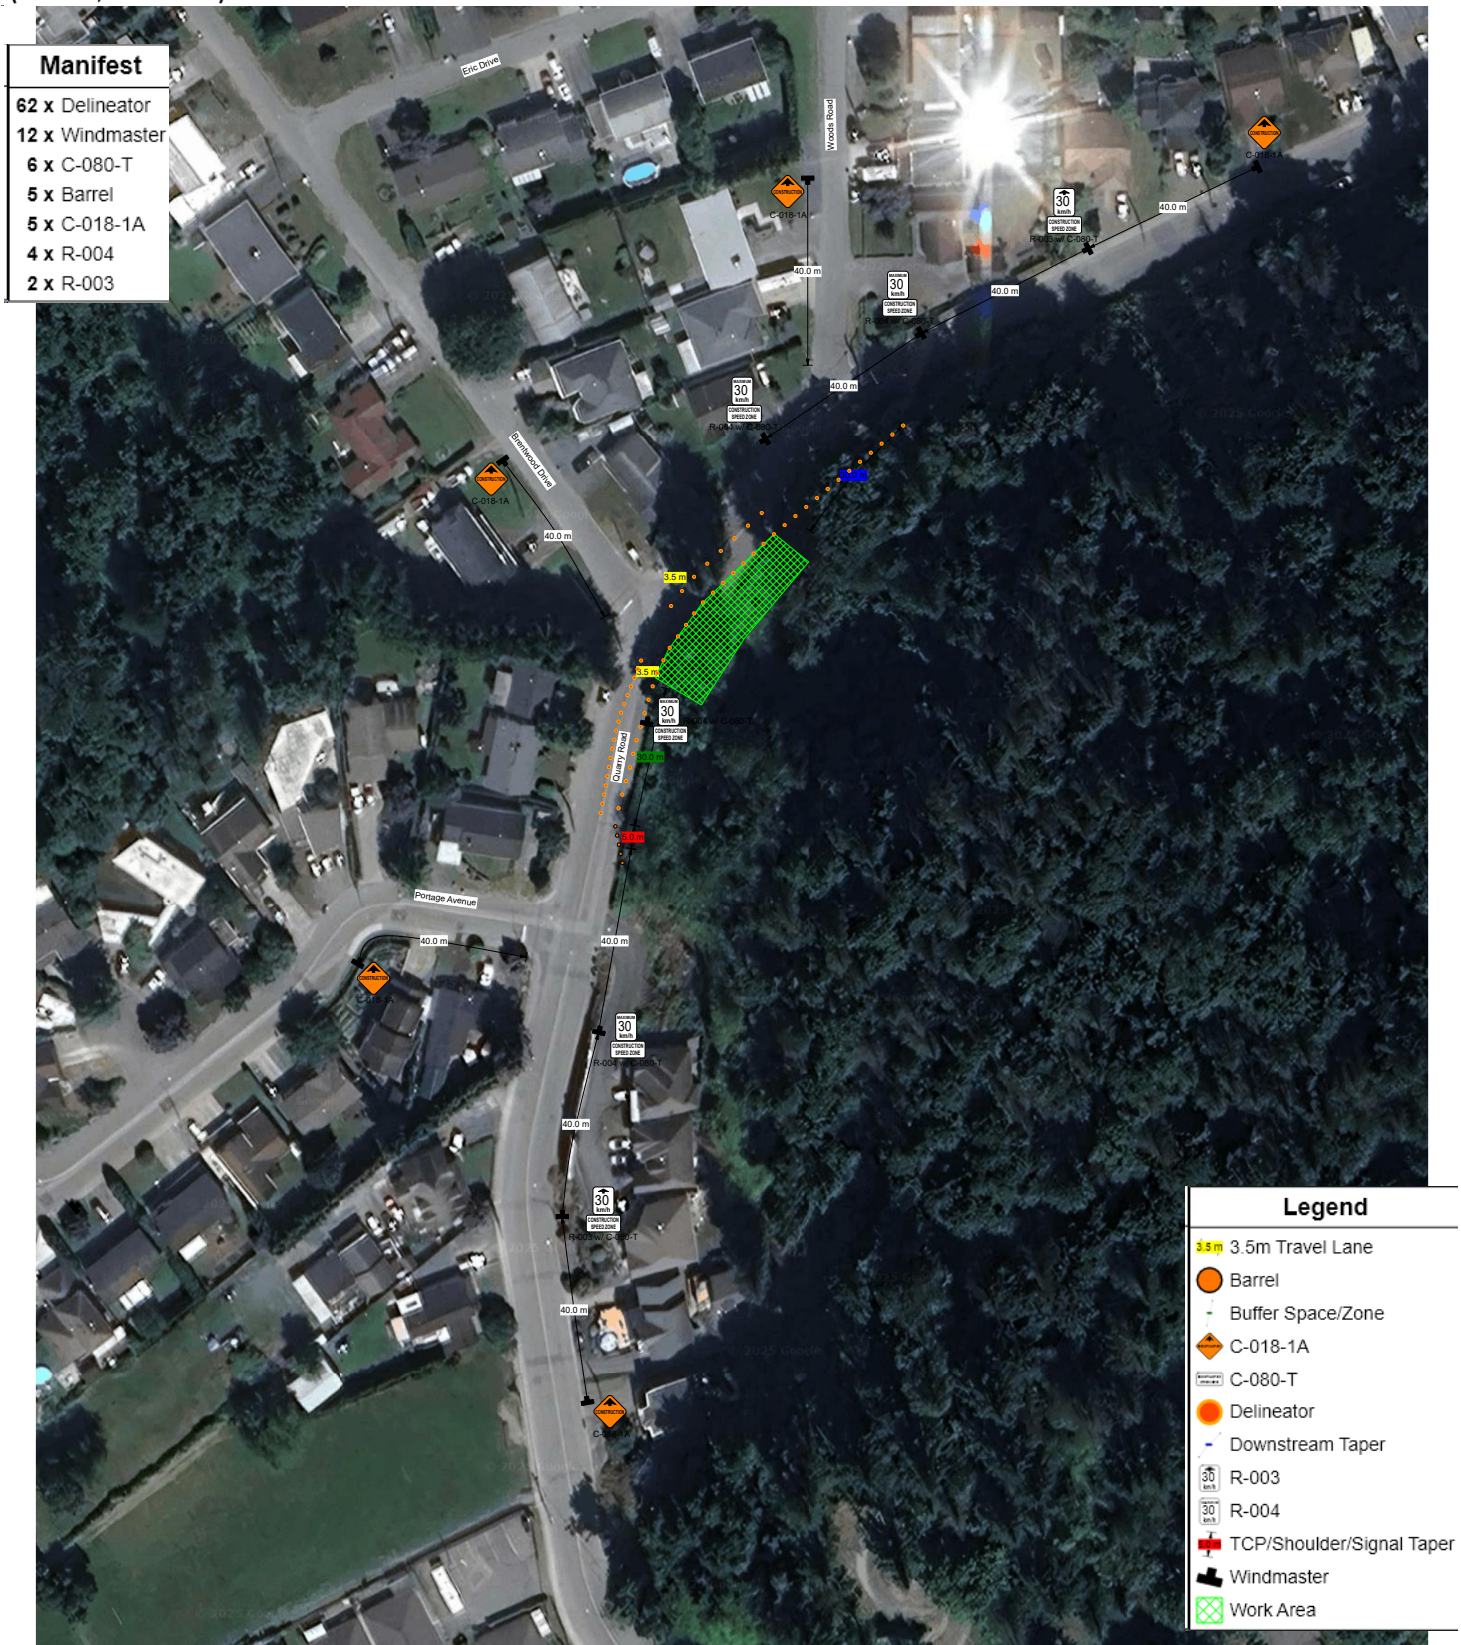

Date: 2026-07-30 Author: LM-SN1082861 Project: Ballina (Civil) - Quarry Road (Near Brentwood Drive), Roadside Work – Encroachment into Travel Lane – Short and Long Duration

Comments:

Figure 7.7: Roadside Work – Encroachment into Travel Lane – Short and Long Duration

General Notes:

- 1) Roadside Work – Encroachment into Travel Lane – Short and Long Duration to facilitate safe clear zone for utility upgrade project
- 2) TCP's to use radio for communication
- 3) TCP's to assist pedestrians and cyclists around workzone
- 4) Property access to be maintained at all times
- 5) Plan based on 50km/h speed zone
- 6) 5m TCP/Signal/Shoulder Taper, 40m Centreline Run-In, 30m Buffer Space/Zone and Downstream Taper, 5-10m channelizing device spacing and 40m sign spacing - may be shortened due to urban blocks. Windmasters used for Multi-lane Roadway
- 7) Travel Lane must be minimum 3.5m wide
- 8) All equipment picked up and removed at end of day, roadway to be resumed to normal configuration
- 9) All signage in accordance with Traffic Manual for Work on Roadways (2020 Edition)
- 10) Modification: AFAD's to be deployed to facilitate local traffic as per Hierarchy of Controls
- 11) Start Date: TBD - Duration: TBD, Working Hours: 7:00 am to 5:00 pm
- 12) Site Contact: TBD