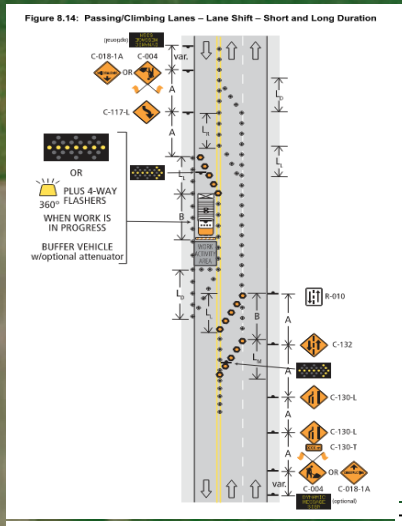

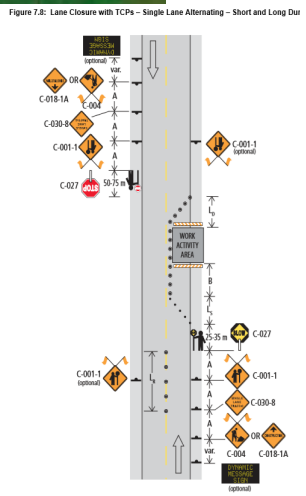

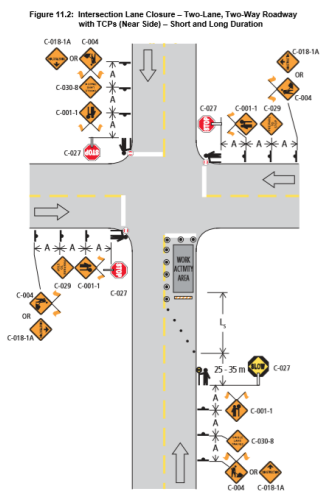

-Traffic control personnel to assist traffic flow at all intersections

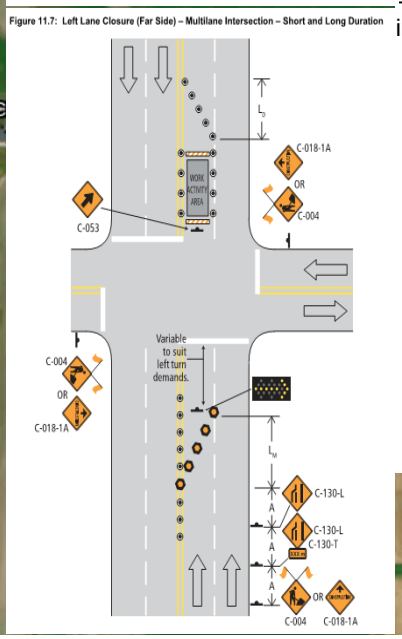

-Sidewalks to remain free and clear of debris to maintain foot traffic
-Cyclist will share the road

-Traffic to be shifted to single lane two direction on opposing side of lane that is being paved. This will enable full lane paving in NB and SB directions. Lanes to be delineated to assist with flow.